


FRONT VIEW

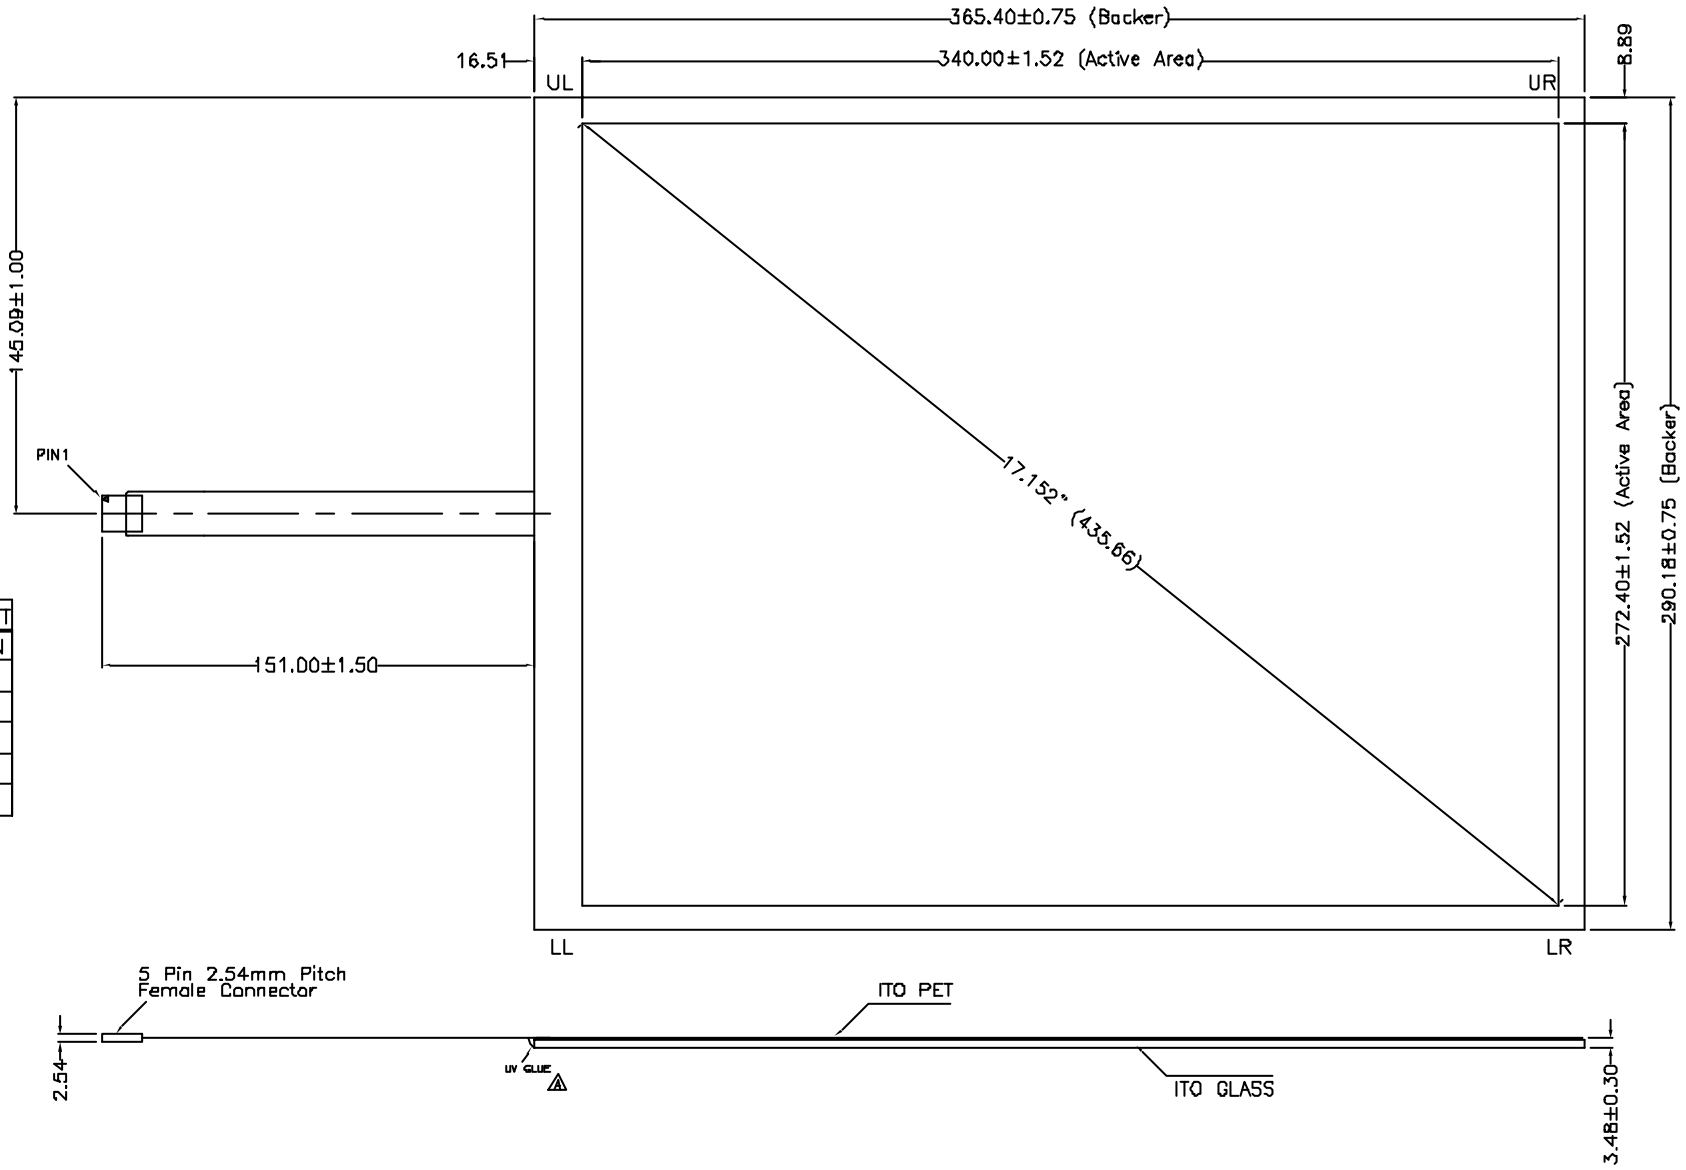

| CONNECTOR PINOUT | |
|------------------|-------------|
| PIN# | DESIGNATION |
| 1 | UR |
| 2 | LR |
| 3 | S |
| 4 | UL |
| 5 | LL |

- NOTES:
1. ITO GLASS THICKNESS : 3.18mm
 2. OVERALL THICKNESS : 3.48±0.30mm
 3. CONNECTOR AND PINOUT AS INDICATED
 4. FRONT SURFACE : GLARE HARDCOAT
 5. TAIL TYPE : FPC WITH CONNECTOR
 6. OTHER SPEC : SEE APPROVAL SHEET

| NO. | DATE | DESCRIPTION |
|-----|--------------|------------------------------|
| A | SEP 27, 2004 | ADD UV GLUE TO TAIL LOCATION |

| REVISION | | | |
|-----------------|-----------------|--------------|--|
| CHIEF OF DESIGN | APPROVED | | |
| ENGINEER | PROJECT MANAGER | | |
| DRAWN BY | DATE | SEP 27, 2004 | |
| SHT 1 OF 1 | REV. | A | |

San Technology, Inc.

| | | |
|-----------------------------|--------|--|
| TOLERANCES UNLESS SPECIFIED | | PROJECT NAME : 2503 DWG NO : 2503-1-01 SCALE: 1:1 UNIT: mm |
| .X | ± 0.50 | |
| .XX | ± 0.50 | |
| .XXX | ± 0.30 | |
| ANGULAR | - | |