


FRONT VIEW

| Pin# | Assignment |
|------|--------------|
| 1 | Top |
| 2 | Top sense |
| 3 | Bottom sense |
| 4 | Bottom |
| 5 | Left |
| 6 | Left sense |
| 7 | Right sense |
| 8 | Right |

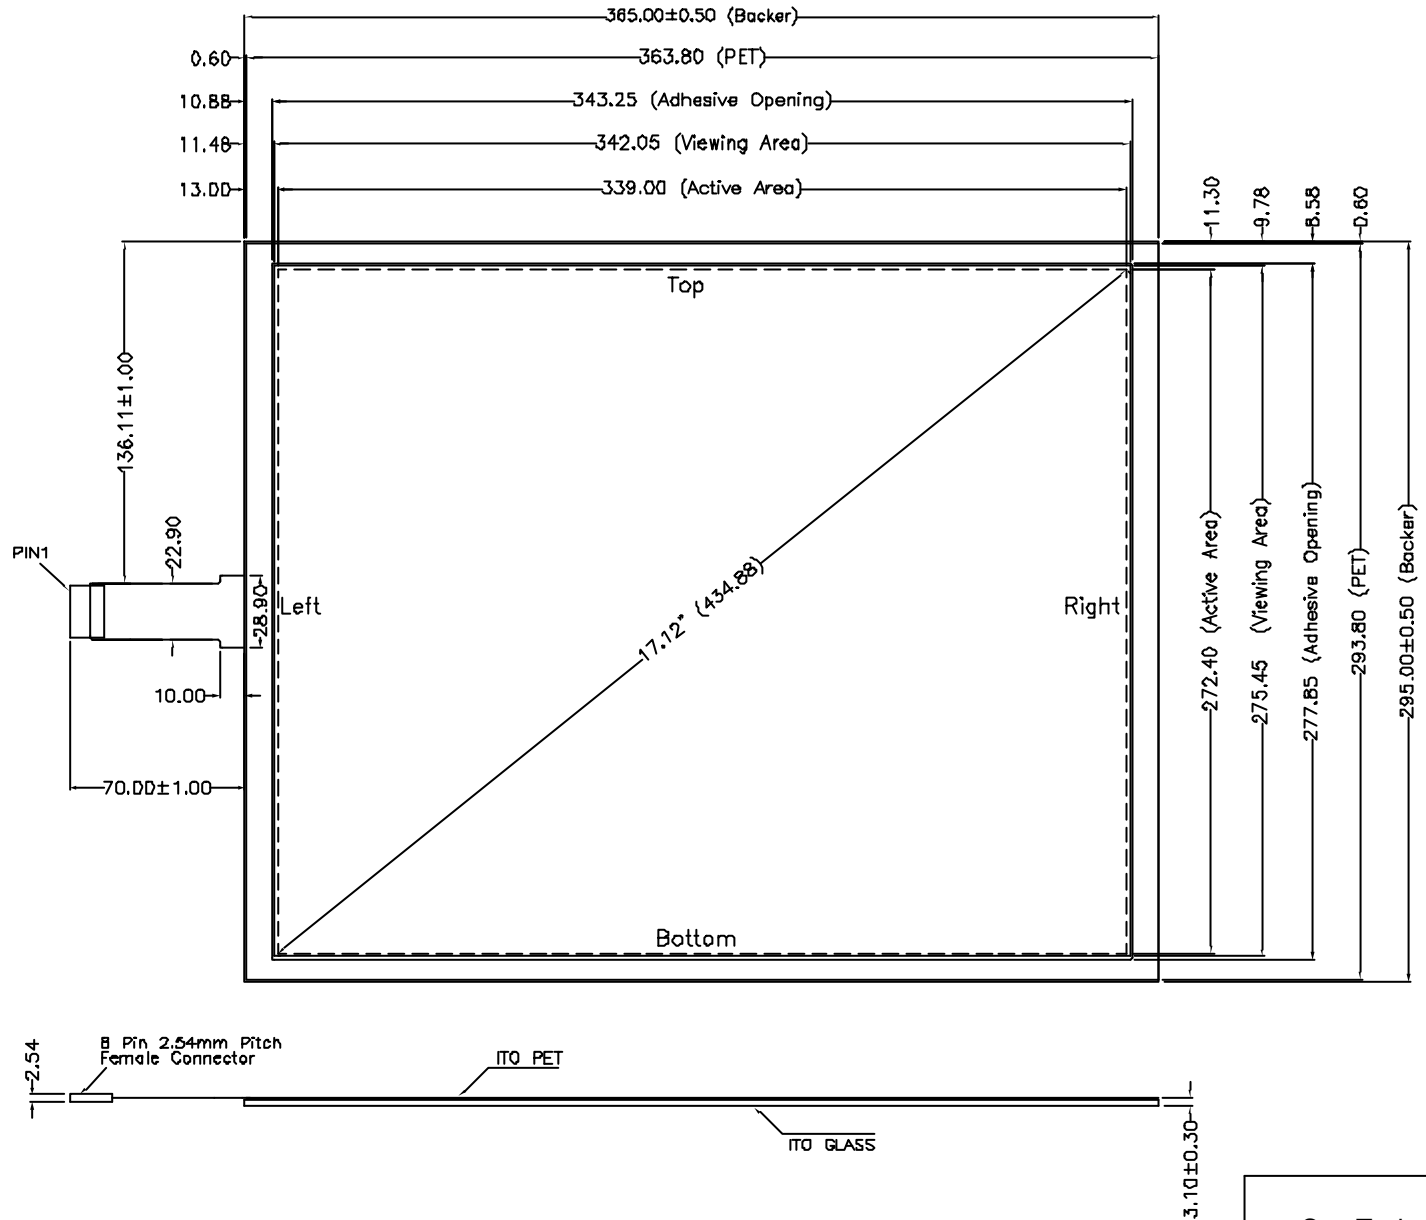

NOTES:

1. ITO GLASS THICKNESS : 2.80mm
2. OVERALL THICKNESS : 3.10±0.30mm
3. CONNECTOR AND PINOUT AS INDICATED
4. FRONT SURFACE : GLARE HARDCOAT
5. LAYER TO LAYER ASSEMBLY TOLERANCE: ±0.50mm
6. TAIL TYPE : FPC WITH CONNECTOR
7. OTHER SPEC : SEE APPROVAL SHEET

| NO. | DATE | DESCRIPTION |
|-----------------|-----------------|--------------|
| REVISION | | |
| CHIEF OF DESIGN | APPROVED | |
| ENGINEER | PROJECT MANAGER | |
| DRAWN BY | DATE | JUL 26, 2004 |
| SHT 1 OF 1 | REV. | |

| | |
|-----------------------------|---------------------|
| San Technology, Inc. | |
| TOLERANCES UNLESS SPECIFIED | PROJECT NAME : 9527 |
| .X ± 0.50 | DWG NO : 9527-1-01 |
| .XX ± 0.50 | SCALE: 1:1 UNIT: mm |
| .XXX ± 0.30 | |
| ANGULAR . | |